




C.R.I. PUMPS

Pumping trust... Worldwide.

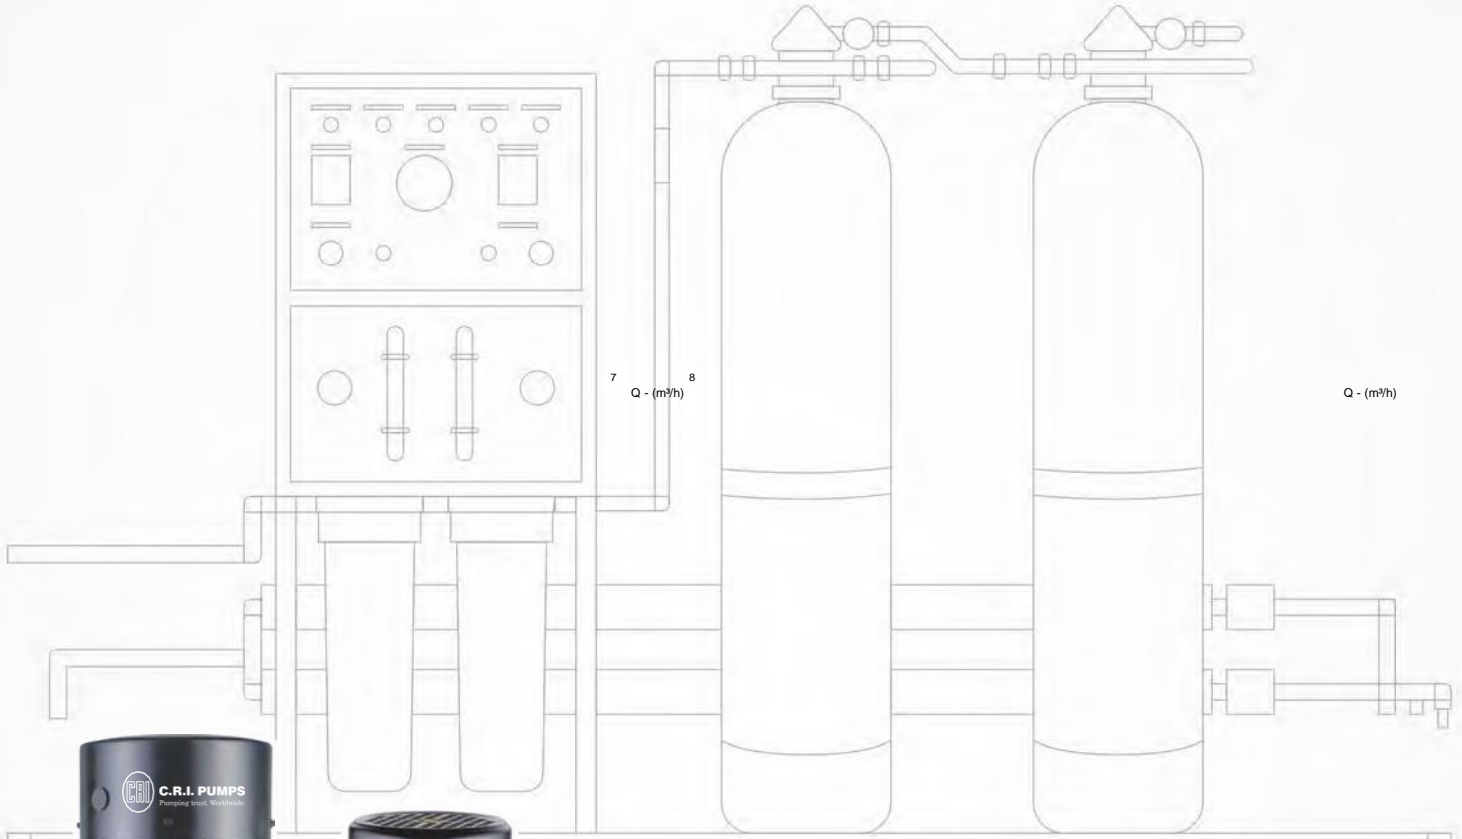

- Corrosion resistant SS pump parts ensures longer life
- Heavy type seal is used for high withstanding capacity
- Enhanced hydraulic efficiency
- Low noise level and low vibration level
- Specially designed for RO application



FEEDER PUMPS



SPECIFICATIONS

Power Range	: 0.37 kW - 1.8 kW (0.5 HP - 2.5 HP)
Maximum Head Range	: 100 Mtrs
Maximum Flow Range	: 3.3 lps (11.9 m ³ /hr)
Version	: Single Phase, 220-240 V, 50Hz, A.C. Supply & Three Phase 380-415 V, 50Hz, A.C. Supply
Liquid Temperature	: 33° C
Ambient Temperature	: 40° C

MATERIAL OF CONSTRUCTION

Pump Casing	: SS / CI
Impeller	: High Tensile Brass / CI / SS / Noryl
Motor Shaft	: SS 410
Mech. Seal	: Carbon & Ceramic
Motor Body	: Aluminium Extruded / CI / SS
Rotor	: Aluminium Die Cast / Copper
Front & Back Cover	: CI

BRISK Multistage Horizontal Centrifugal Pumpset



SPECIFICATIONS

Power ranges	: 0.5 HP to 1 HP
Flow	: 0.8 m ³ /hr to 3.8 m ³ /hr
Maximum pressure	: 5 bar
Liquid temperature upto	: 90°C*

* Applicable only for Special Mechanical Seal

MATERIAL OF CONSTRUCTION

Pump Shell	: SS 304
Suction & Discharge Chamber	: Cast Iron
Rotor	: Aluminium Die Cast
Motor Body	: Aluminium Extruded
Motor Shaft	: SS 410
Impeller	: Noryl
Mechanical Seal	: Carbon & Ceramic

Pressure
is PLEASURE





Total Water Solution Under One Roof



SHUBHA JAL
Water solutions LLP

Sales – 9820735686

Service – 8879524555

Bore Well - 9167985686

Rain Water Harvesting - 8879223222

